


Customer approval :

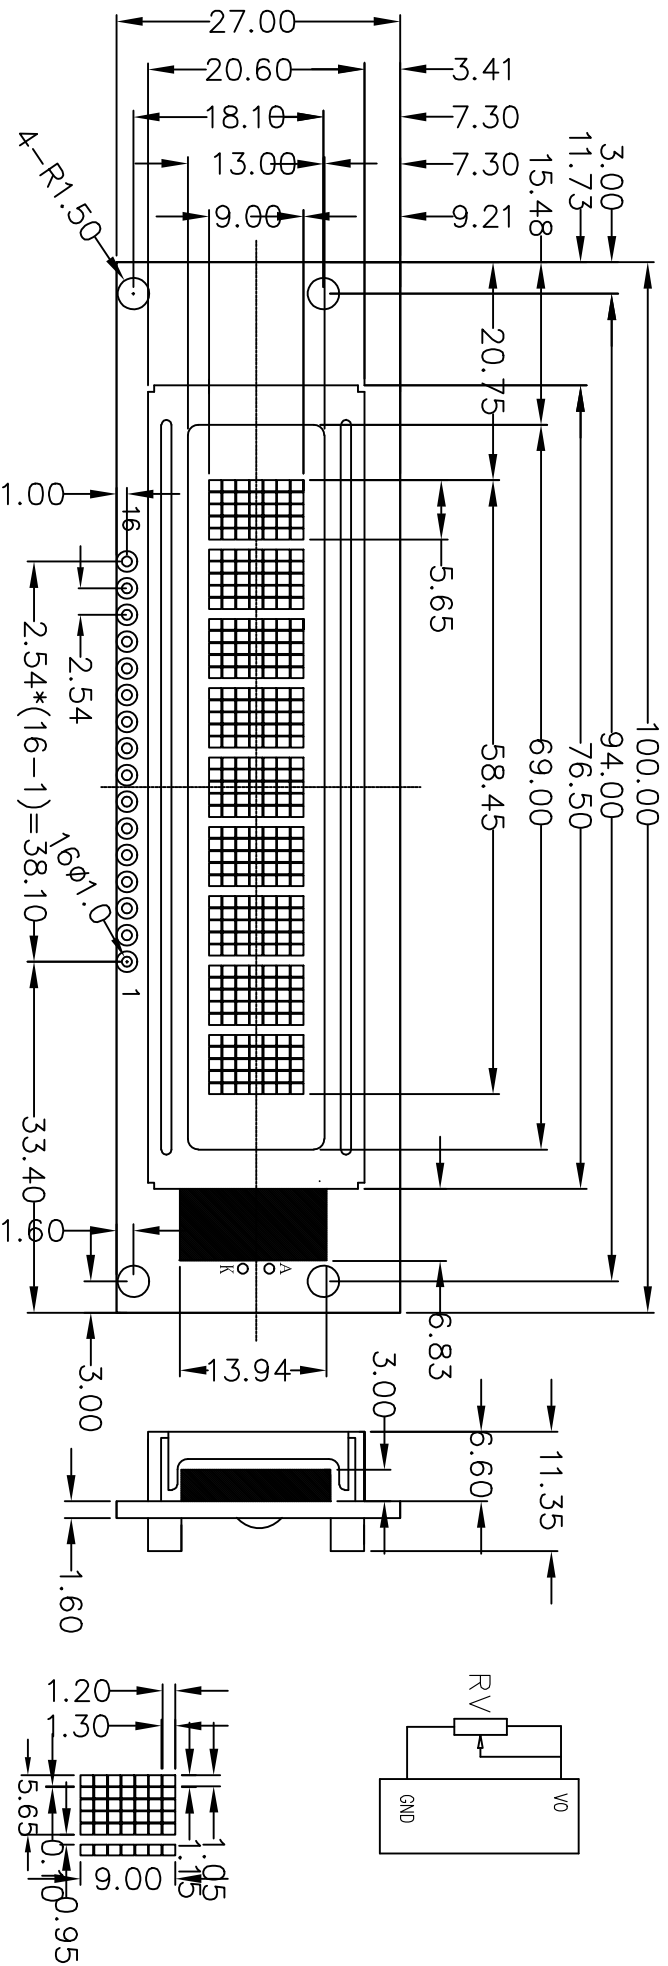

Specification:

- 1). Driving: Duty: 1/8, Bias: 1/4, VLCD: 4.7V(Ref), VDD: 5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN/Positive/Transflective/YG
- 4). Operating temp.: -10°C~+60°C
Storage temp.: -20°C~+70°C
- 5). Controller IC: SPLC780
- 6). Backlight: Edge ,YG LEDX1 ,5V ,15MA
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	VO	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REV	REVISION RECORD	DATE
A0	First issue	11/13

TCC 深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

MODEL NO. SYB0901AV13-5C10YL3-BS5NG GENERAL TOL: ± 0.3

APPROVED BY	CHECKED BY	DRAWING BY	PAGE?	UNIT?
			1 OF 1	mm
			PROJECTION	