

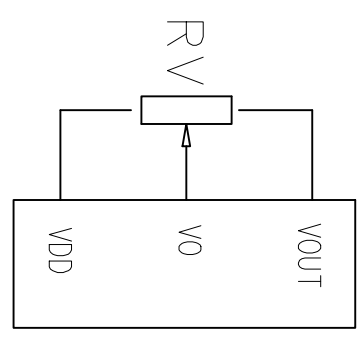
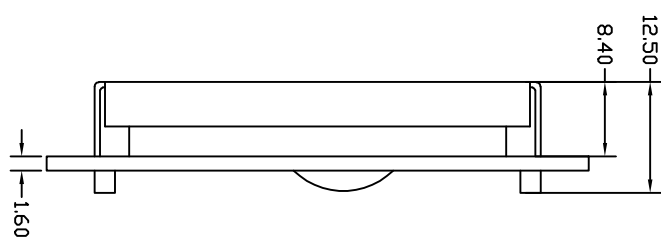



Customer approval :

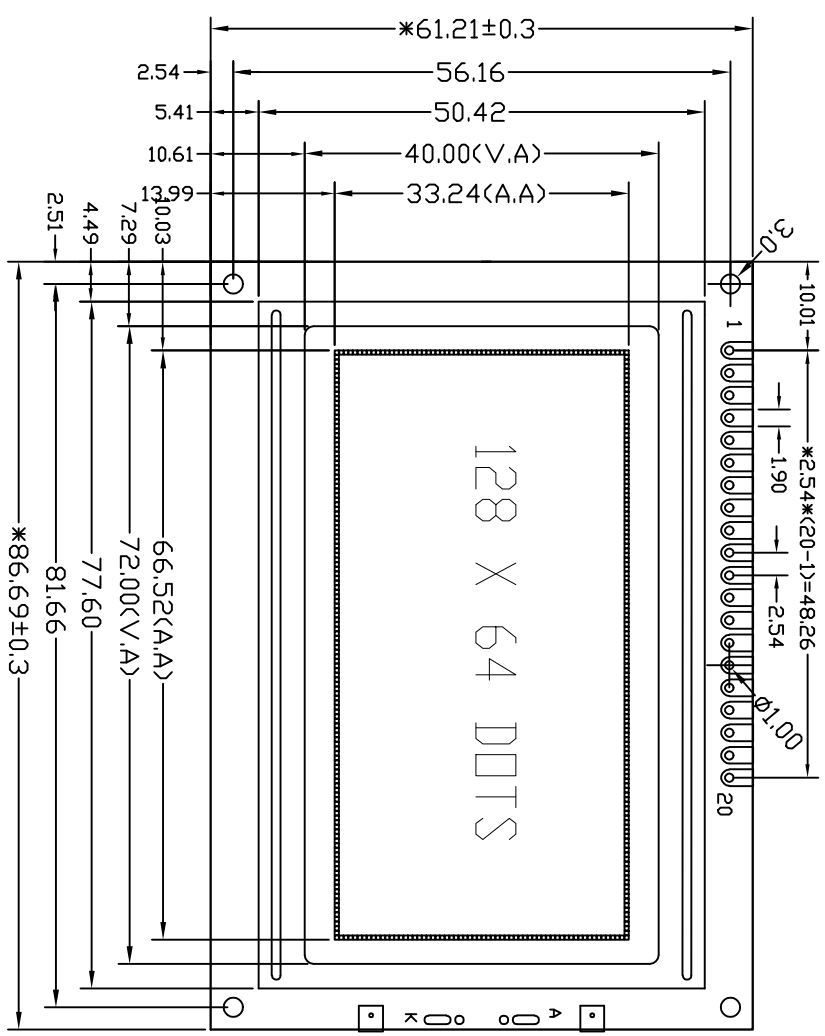

Specification:

- 1). Driving: Dost:128*64,Duty:1/64,Bias: 1/9,VDD: 5V, VOUT: -4.9V, VO: -4.2V
- 2). Viewing Direction: 9 O'clock
- 3). Display mode:STN,Y-G,POSITIVE, TRANSMISSIVE
- 4). Operating temp.: -20°C~+70°C
- Storage temp.: -30°C~+80°C
- 5). Controller IC: AIP31107,AIP31108
- 6). Backlight: SIDE Y-G LED BLA-BLK=5V
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	GND	VDD	VO	RS	RW	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CS1	CS2	/RST	VOOUT	BLA	BLK

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd				GENERAL TOL: ± 0.3		
A0	First issue	02/26	MODEL NO.	SYB12864GV11-5C91L3NR-B5NG	APPROVED BY	CHECKED BY	DRAWING BY	PAGE? 1 OF 1	UNIT: mm
								PROJECTION	