Customer approval :

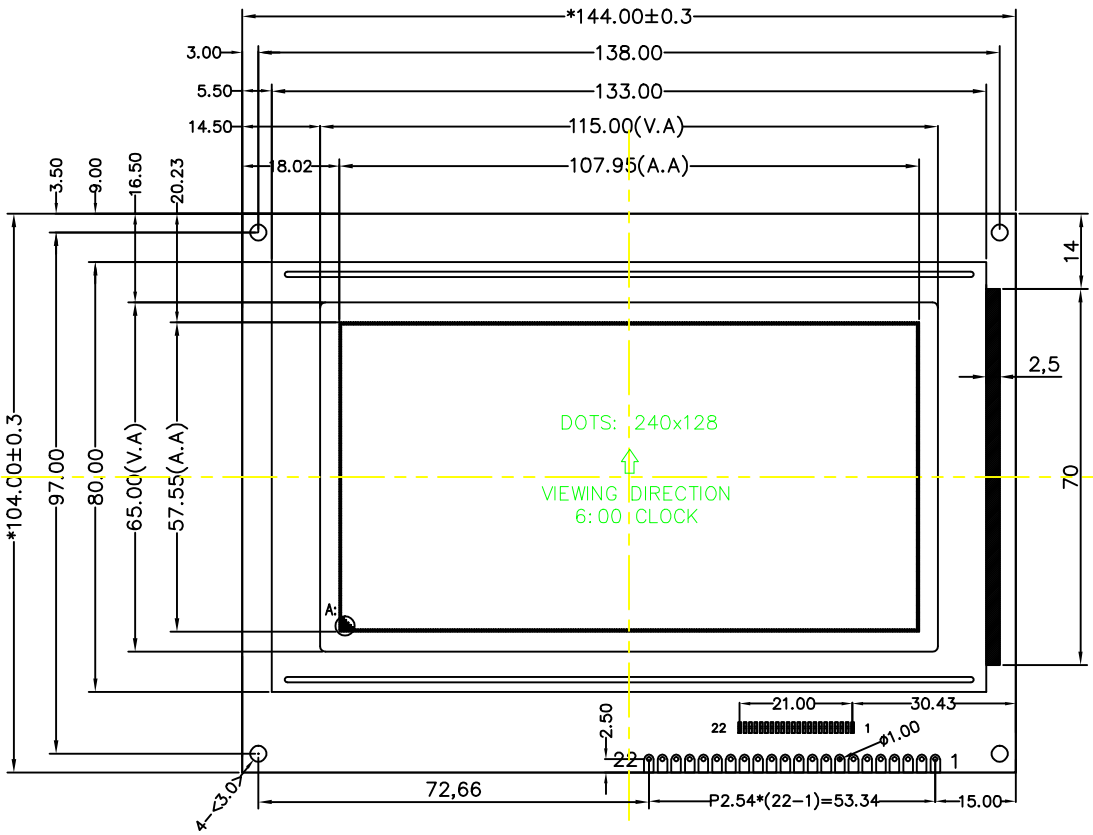

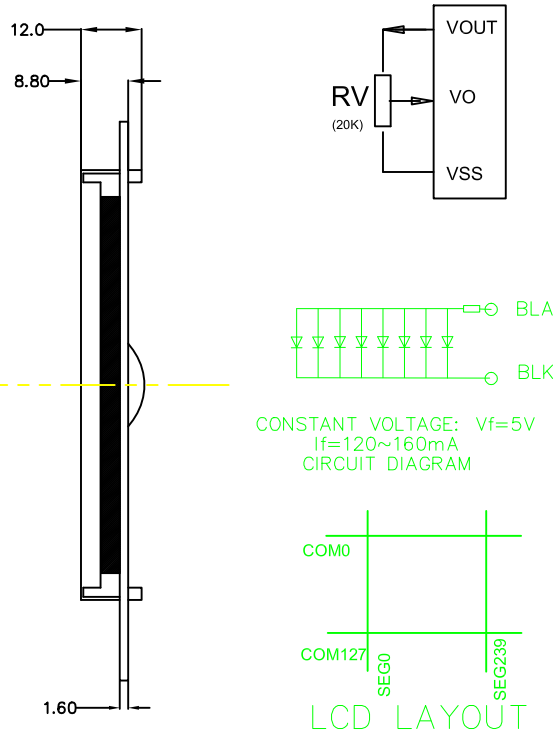

Specification:

1). Driving: Duty:1/128,Bias:1/12,Vout:-14.5V,V0:-12.5V,VDD:5.0V.
2). Viewing direction: 6 o'clock
3). Display mode:STN/Blue/Negative/Transmissive
4). Operating temp:-20°C~+70°C
5). Storage temp: -30°C~+80°C
6). Control IC: T6963C (Or Compatible)
7). Backlight: Edge White LED: 5.0V 120MA
8). dimensions with mark "*" are important
with mark "()" are referenced
9). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTION	FGND	VSS	VDD	VO	/WR	/RD	/CE	C/D	NC	/RST	DB0
PIN	12	13	14	15	16	17	18	19	20	21	22
CONNECTION	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	VOUT	BLA	BLK



REV	REVISION RECORD	DATE
A	FIRST ISSUE	2015/11/03
B		
C		
D		

深圳市三元晶科技有限公司
ShenZhen TCCLCD HI- Tech Co., Ltd.

MODEL NO. 模组型号	SYB240128A3V21-5C5BLN9R-B5WI		GENERAL TOL: 未注公差	± 0.25
APPROVED BY 审核	CHECKED BY 检查	DRAWING BY 绘图	PAGE: 页面 1 OF 1	UNIT: 单位 mm
Liu 2015/11/03	Francis 2015/11/03	Luoxian 2015/11/03	PROJECTION 三角法	