




Customer approval :

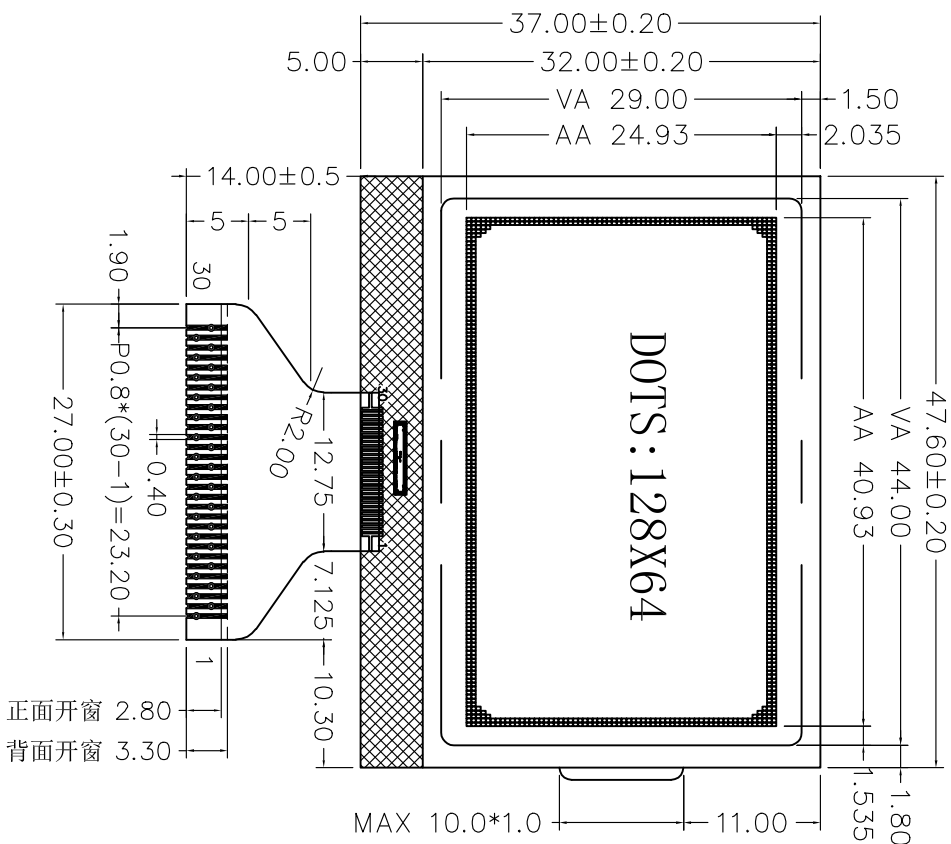


MAX 2.00
0.70±0.07
0.70±0.07

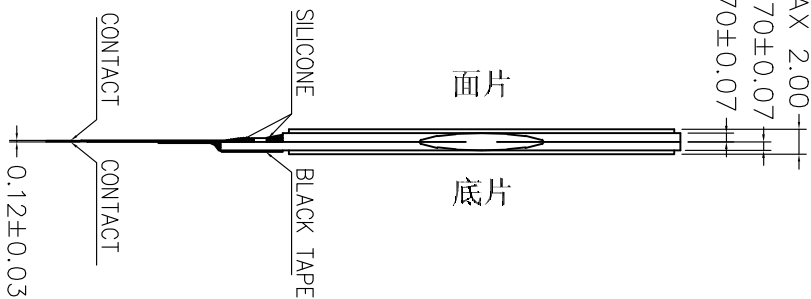

1	ESD	16	VSS
2	CS1B	17	VOUT
3	RST	18	CAP3+
4	A0	19	CAP1-
5	/MR(R/W)	20	CAP1+
6	/R0(E)	21	CAP2+
7	D0	22	CAP2-
8	D1	23	V4
9	D2	24	V3
10	D3	25	V2
11	D4	26	V1
12	D5	27	V0
13	D6	28	C86
14	D7	29	PSB
15	VDD	30	ESD



DOTS SIDE
SCALE 20:1

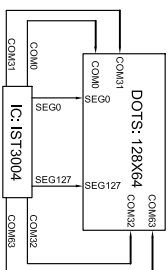

LCD LAYOUT

- Specifications:
1. Display Mode: FSTN/Transmissive/Positive.
 2. Viewing Angle: 6 0'clock.
 3. Drive Method: 1/64 Duty 1/9 Bias, Vop=9.0V, Vdd=3.0V.
 4. Top: -30°C~+80°C, Tst: -30°C~+85°C.
 5. Connector: COG+FPIC.
 7. Drive IC: IST3004
 8. With " * " Mark Dimensions Are Important Dimensions.

REV	REVISION RECORD	DATE	TCCG			GENERAL TOL:		
A	FIRST ISSUE	2015/11/03	 深圳市三元晶科技有限公司 Shenzhen TCCLCD Hi-Tech Co., Ltd.			±0.3		
B						MODEL NO. 模组型号	SYG12864315-3063F3UN2-BWC	
C						APPROVED BY 审核	Francis 检查	PAGE: 页码
D						DRAWING BY 绘图	Luoklan 三角洪	UNIT: 单位
			DATE	2015/11/03				