


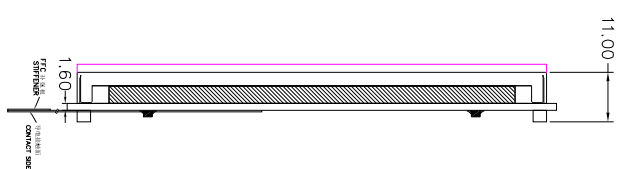


Customer approval :

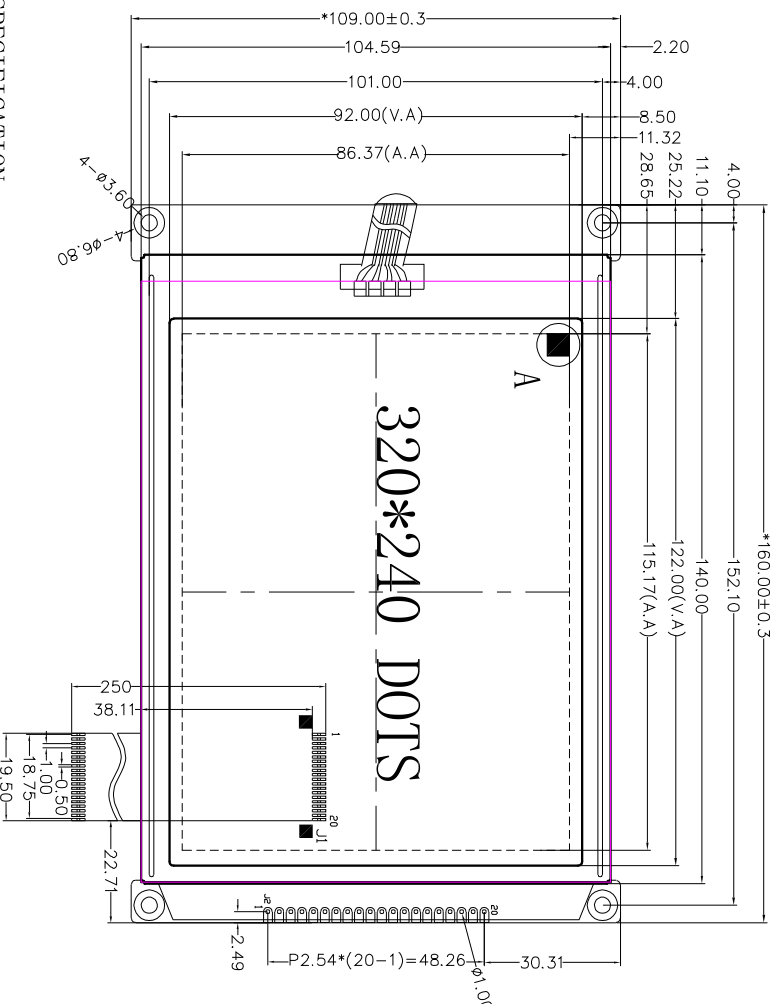

**SPECIFICATION:**

- 1). Driving: Duty:1/240, Bias:1/17, VOUT:-21.5V, V0:-18.5V, VDD:5V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20 °C~+70 °C  
Storage temp.: -30 °C~+80 °C
- 5). Control IC: RA8806 or RA8803
- 6). BACKLIGHT Type: White 5V 160ma
- 7). DIMENSIONS WITH MARK "\*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

接口选择使用, RPC选择使用, TP选择使用

J1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
J2	GND	VCC	V0	/MR	/RD	/CS	C/D	/RES	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	INT	BUSY


**深圳市三元晶科技有限公司**  
 Shenzhen TCC LCD Hi-Tech Co., Ltd.

REV	REVISION	RECORD	DATE	MODEL NO.	APPROVED BY	CHECKED BY	DRAWING BY	GENERAL TOL:	PAGE	OF	UNIT:	PROJECTION
A0	First issue		03/15	模组型				±0.3	1	3	mm	三视图
				SYM320240BZK V13			LAN					